

DELTA WATER TECHNOLOGY ®



*Delta*  
WATER SOFTENERS



# *Delta* ARENAL



- Non-electric operation
- 9 different orientations possible
- Easy to install
- High low rates
- Small salt and water consumption

100% GREEN







# Delta

WATER SOFTENERS

# ARENAL

## DIMENSIONS

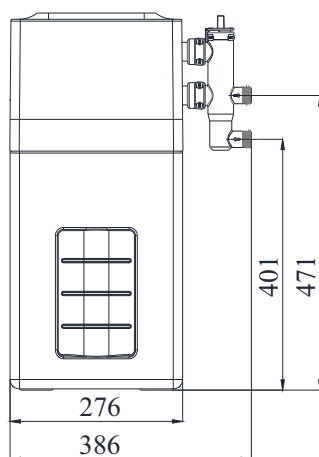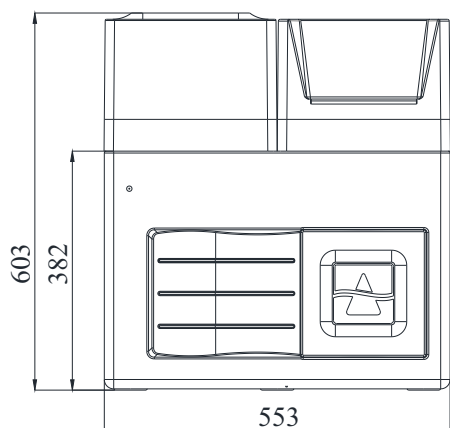

## TECHNICAL DATA

Connection	3/4" or 1"
Working Pressure	1 - 8 bar*
Flow Rate ( $\Delta p$ 1 bar)	2.1 m <sup>3</sup> /h
Exchange Capacity	600 m <sup>3</sup> /ppm CaCO <sub>3</sub>
Water Usage / Regeneration	50 L
Salt Usage / Regeneration	1.2 kg
Regeneration Time	30 min
Max. Temperature	40°C
Volume of resin	12 L

\* for a correct regeneration, Delta Softeners require a minimum outlet pressure of 0.8 bar.

100% GREEN

Delta Water Engineering NV  
 Waesdonckstraat 1, 2640 Mortsels (Antwerp), BELGIUM  
 T +32 3 219 50 70  
 E [info@deltawatersystems.com](mailto:info@deltawatersystems.com) U [www.deltawatersystems.com](http://www.deltawatersystems.com)

