



*Delta*  
WATER SOFTENERS



# *Delta* ONEGA



- Non-electric operation
- 9 diferent orientations possible
- Easy to install
- High low rates
- Small salt and water consumption

**COMPLETELY  
NEW DESIGN**

**100% GREEN**




# Delta

WATER SOFTENERS

# ONEGA

## DIMENSIONS

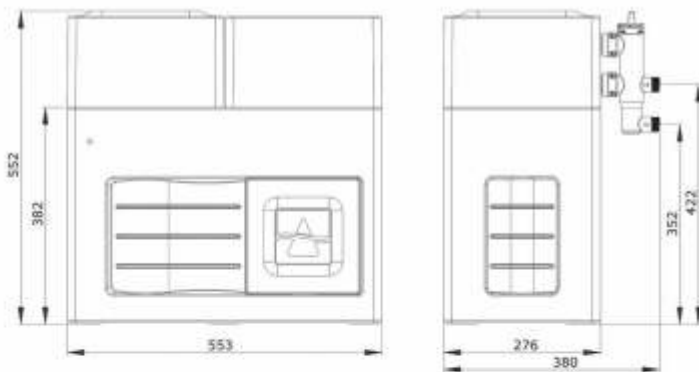

## TECHNICAL DATA

|                               |  |
|-------------------------------|--|
| Connection                    | 3/4" , 1"                                |
| Volume of resin               | 9 L                                      |
| Working Pressure              | 1 - 8 bar*                               |
| Flow Rate ( $\Delta p$ 1 bar) | 2,0 m <sup>3</sup> /h                    |
| Exchange Capacity             | 400m <sup>3</sup> /ppm CaCO <sub>3</sub> |
| Water Usage / Regeneration    | 40 L                                     |
| Salt Usage / Regeneration     | 0,9 kg                                   |
| Regeneration Time             | 24 min                                   |
| Max. Temperature              | 40°C                                     |

\*for a correct regeneration, Delta Softeners require a minimum outlet pressure of 0.8 bar

100% GREEN

**Delta Water Engineering NV**

Waesdonckstraat 1, 2640 Mortselsel (Antwerp), BELGIUM

T +32 3 219 50 70

E [info@deltawatersystems.com](mailto:info@deltawatersystems.com) U [www.deltawatersystems.com](http://www.deltawatersystems.com)

